BioSentinel: Mission Development Update of a Radiation Biosensor to Gauge DNA Damage and Repair on a 6U Nanosatellite


Bob Hanel – Project Manager Matt D'Ortenzio - Mission Operations Manager James Chartres Hugo Sanchez Vanessa Kuroda

Interplanetary Small Satellite Conference Caltech, Pasadena, CA 4/25/16

uthors Affiliated with NASA Ames Research Center, Moffett Field, CA




- Advanced Exploration Systems (AES) Program Office selected BioSentinel to fly on the Space Launch System (SLS) Exploration Mission (EM-1) as a secondary payload
 - Payload selected to help fill HEOMD Strategic Knowledge Gaps in Radiation effects on Biology
 - Current EM-1 Launch Readiness Date (LRD): July 31, 2018
- Key BioSentinel Project Objectives
 - Develop a *deep space nanosat* capability
 - Develop a *radiation biosensor* useful for other missions
 - Define & validate SLS secondary payload interfaces and accommodations for a biological payload
- Collaborate with two other AES selected missions (non-biological) for EM-1
 - Near Earth Asteroid (NEA) Scout (MSFC)
 - Lunar Flashlight (JPL)






BioSentinel Science Concept

- Quantify DNA damage from space radiation environment
 - Space environment cannot be reproduced on earth
 - Omnidirectional, continuous, low flux with varying particle types
 - Health risk for humans spending long durations beyond LEO
 - Radiation flux can spike 1000x during a Solar Particle Event (SPE)
- Correlate biologic response with LET and TID data
 - BioSensor payload uses engineered S. cerevisiae yeast
 - Measures rate of Double Strand Breaks (DSB) in DNA
 - Linear Energy Transfer (LET) Spectrometer measures particle energy and count
 - Total lonizing Dose (TID) Dosimeter measures integrated deposited energy
- Yeast assay uses microfluidic arrays to monitor for DSBs
 - Three strains of S. cerevisae, two controls and engineered strain
 - Wet and activate multiple banks of micro-wells over mission lifetime
 - DSB and associated repair enable cell growth and division
 - Activate reserve wells in event of a Solar Particle Event (SPE)

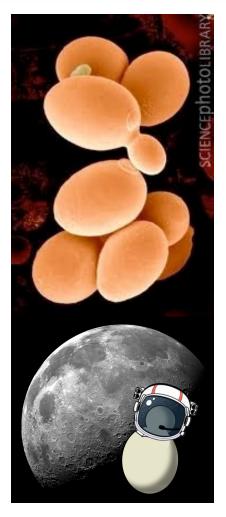



Secondary Payload Location on SLS EM-1

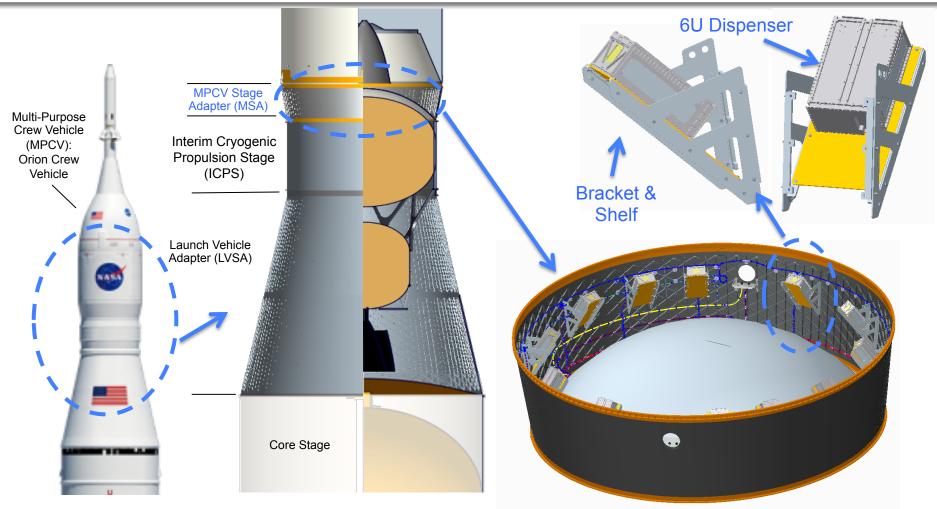

- 13 dispenser locations that each support a 6U (14 kg) secondary payload
- 1 bracket location allocated to a sequencer
- EM-1 only accommodates 6U payloads; EM-2 may accommodate 12U
 payloads
 Interplanetary Small Satellite Conference 4/25-26/16

BioSentinel EM-1 Mission

Launch



Artist's rendering of the Space Launch System

- Up to 13 secondary payloads deployed and powered within the same 2 hour window
- Low relative velocity between secondary payloads

Lunar Transfer &

Fly-by

Lunar Transit

3-7 days

Secondary P/L

Deployment

(L+4-5 hrs)

- BioSentinel will not perform a delta-V maneuver, will follow IPCS into disposal orbit
- Final orbit of secondary's to be determined
- Will likely be Earth-interior, heliocentric orbit

BioSentinel: Escape into Heliocentric Orbit

Mission Orbit

☆


Venus orbit

Earth orbit

BioSentinel orbit


- Far outside the LEOs typically occupied by CubeSats
 - Range to Earth of 0.73 AU at 18 months
 - Far outside the protective shield of Earth's magnetosphere

BioSentinel FreeFlyer Spacecraft: Physical Overview

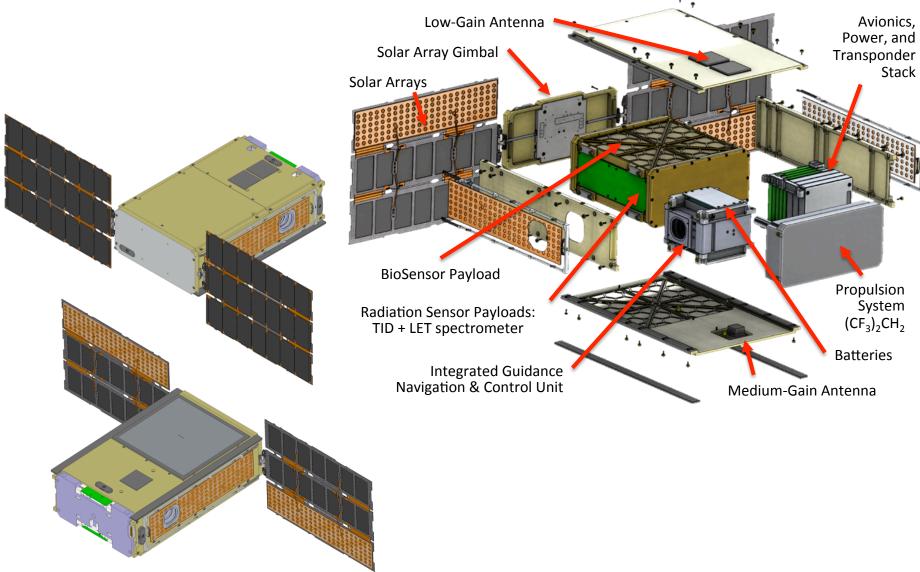

BioSensor – Optical Measurement of Yeast in Fluidic Card Well

NASA

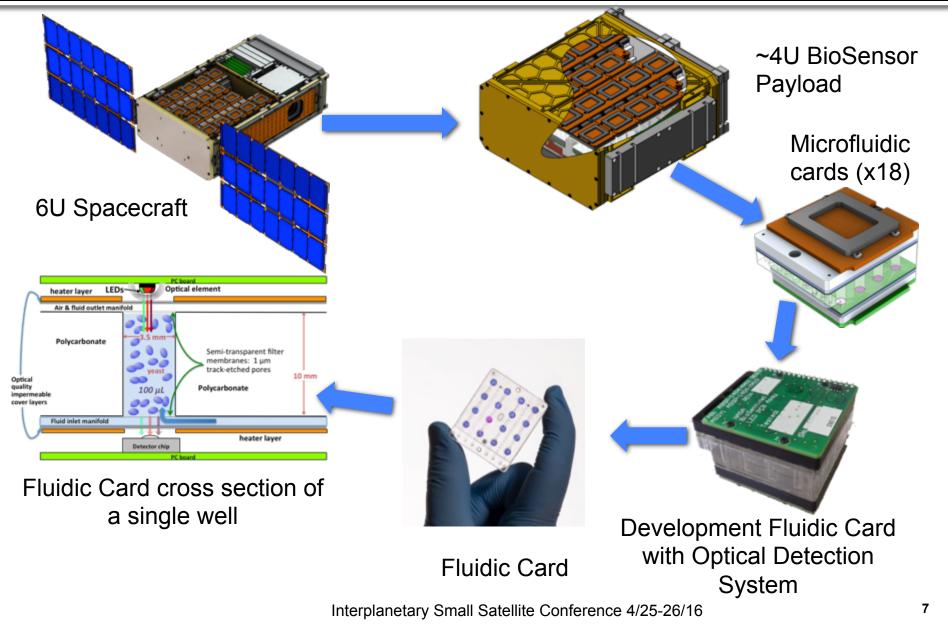




BioSentinel Mission Phases


Phase	Entry	Exit	Duration	Summary & Objectives
Pre-Launch	Loading of biology	L/V Lift-off	~6 months	 Configure BioSentinel for launch, then power-off
Launch	L/V Lift-off	Launcher Deploys BioSentinel	~5 hours	Powered offSurvive launch environments and deployment
Initialization	BioSentinel separates from SLS	Complete S/C checkout	~14 days	 Power-on, reduce tip-off rates, deploy solar arrays, transition to safe mode Ground station initial acquisition and tracking Check-out of S/C systems Lunar fly-by likely to occur
Science	Nominal Spacecraft SOH	Final BioSensor card is expired	365 days (goal of 540)	 Collect data from all payloads Execute card experiments per science timeline Respond to SPE events Collect Spacecraft SOH
Decommissioning (note, not same as Project Phase F)	End of Nominal Science Operations	Final pass with decommissioning command	~7 days	 Ensure all data downlinked Solar array switches open to ensure battery never recharges

BioSentinel Link Margin (dB) vs. Mission Days

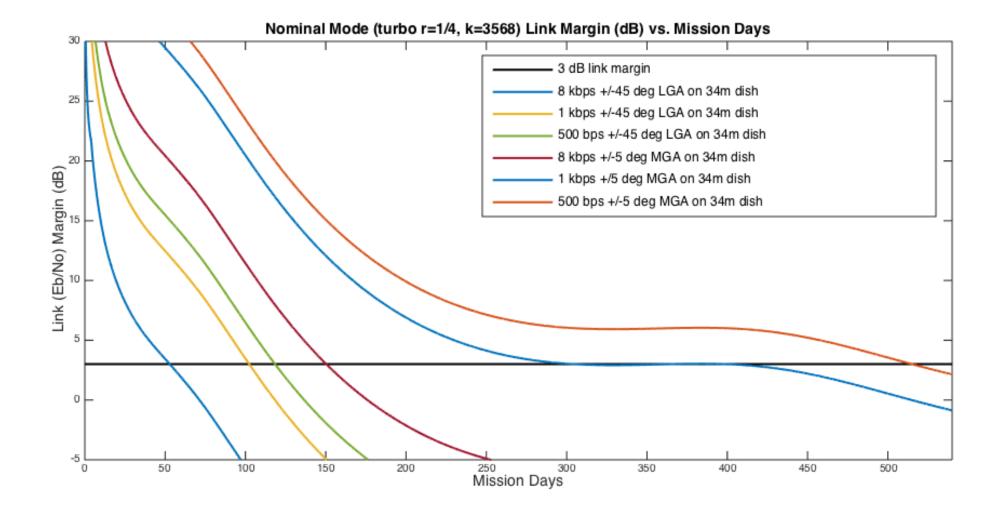



BioSentinel Month-in-the-Life ConOps

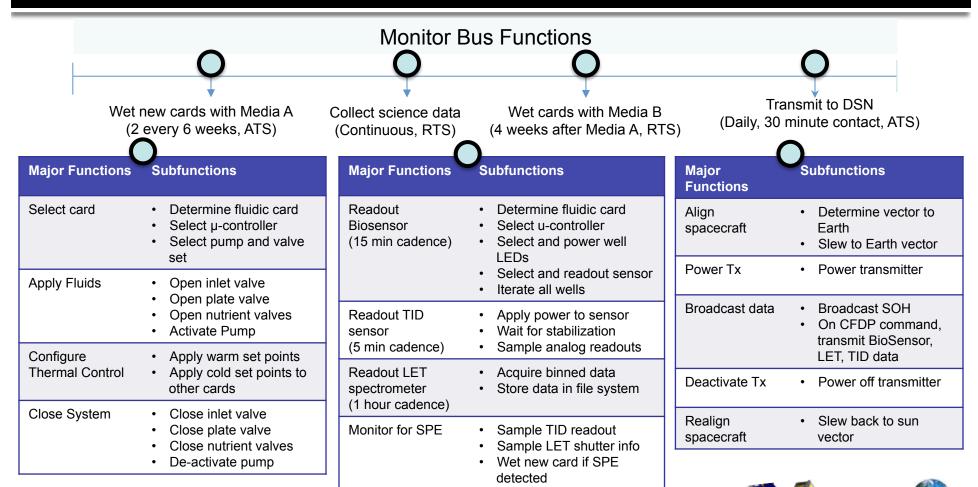








Ground System Architecture

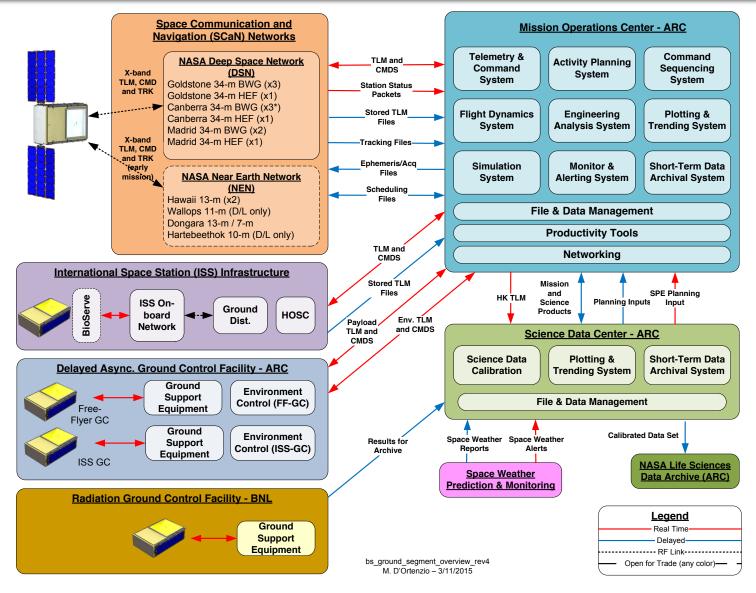



Preliminary Operational Staffing Profile

Mission Phase	Length	Mission Operations Staffing Profile	Assumptions/Comments
Pre-Launch	~ 30 day	 4x5 support for monitoring of BioSentinel DSGC pre-launch profile 	- DSGC must start while BioSentinel is at KSC
Launch & Ascent	~ 1 day	- Full team will staff the MOC	 BioSentinel is powered off. No real- time stream of data from S/C into the MOC during L&A
Initialization	~ 14 days	 24x7 console support for L + 5 days to check out S/C bus systems, ensure payloads are functional, perform orbit determination and update activity plan 	 Launch dispersions and deployment uncertainty will require BioSentinel re-plan cycle. No propulsive maneuver to achieve heliocentric orbit.
Science (early)	~ 60 days	 8x5 console support to monitor first two biosensor experiments and to assist in planning and executing calibration activities as needed Surge support if needed 	- Autonomous momentum dumping
Science (routine)	~ 305 days	 One planning cycle every week with goal of two weeks Uplink console supports once per week, available for other with notice Continuous trending of S/C bus data Console staff on-call to respond to SPE 	 Review of DSN schedule every month, for three months in the future Limited real-time changes to schedule and plan except for SPE response
Extended Science	~ 180 days	- Continuation of Science	



BACK-UP




BioSentinel FreeFlyer Spacecraft Bus Summary

- LEON3 RT based C&DH
 - Embedded VxWorks OS with cFS/cFE
 - Port of LADEE FSW for Bus
 - Port of EcAMSat / SporeSat FSW for P/L
- 3-axis controlled GNC system
 - Blue Canyon XACT Integrated GN&C Unit
 - 3 Reaction Wheels
 - Star Tracker
 - CSS, IMU for safe mode
 - 5° pointing requirement
- Propulsion
 - 3D printed system from GT / LSR
 - Null tipoff rates and momentum management
 - Seven cold gas R236cf thrusters
 - ~60 sec lsp
 - ~200 grams propellant
- Communications
 - X-Band to DSN @ 62.5 8000 bps
 - LGA and MGA patch antennae
 - IRIS v2 coherent transponder

- Power
 - ~32 W generated power EOL
 - Deployable HaWK arrays from MMA
 - Panasonic 18650 batteries
 - ARC design EPS and switch controllers
- Structure
 - 6U nominal volume
 - ARC Nanosat heritage
 - EcAMSat provided baseline for BioSentinel development
- Thermal
 - Cold biased system
 - Heaters, thermistors, paint, reflective tape for control
- Supports Payloads
 - Yeast based BioSensor Payload
 - JSC LET Spectrometer
 - Teledyne based TID Dosimeter
 - 4U volume

Overview - Orbital Impact on Communications

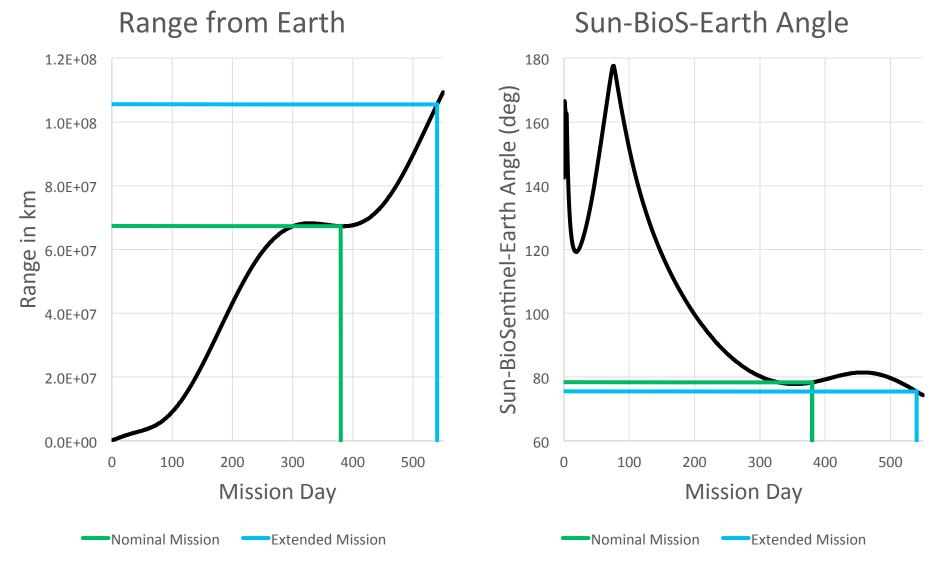



The Project Team

- Mission Management
 - Bob Hanel, Dawn McIntosh, James Chartres, Mario Perez, Elwood Agasid,
- Science
 - Sharmila Bhattacharya, Sergio Santa Maria, Diana Marina, Macarena Parra, Tore Straume, C. Mark Ott, Sarah Castro, Greg Nelson, Troy Harkness
- Payload
 - Tony Ricco, Travis Boone, Ming Tan, Charlie Friedericks, Aaron Schooley, Mike Padgen, Diana Gentry, Terry Lusby, Scott Wheeler, Susan Gavalas, Edward Semones
- Spacecraft and Bus
 - Hugo Sanchez, Matthew Sorgenfrei, Matthew Nehrenz, Vanessa Kuroda, Ben Klamm, Craig Pires, Shang Wu, Abe Rademacher, Josh Benton, Doug Forman

Affiliations NASA Ames, NASA JSC - RadWorks, LLUMC, Univ. Saskatchewan

Support NASA Human Exploration and Operations Mission Directorate (HEOMD); Advanced Exploration Systems Division – Jitendra Joshi, Jason Crusan Program Execs.